




Regulus tige

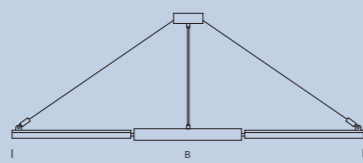


Regulus soffitto



Regulus parete



Regulus parete SB

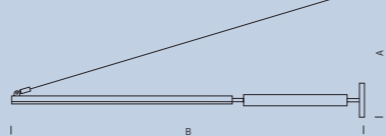

Regulus

Design Giancarlo Fassina, Carlo Forcolini

Regulus

Emissione e applicazioni

Programma di apparecchi per l'illuminazione diretta o indiretta ad alto rendimento e basso consumo.

Versioni da parete e soffitto di qualsiasi altezza.

Il diffusore garantisce un rendimento ottimale ed un eccezionale effetto estetico.

Materiali

Alluminio estruso o pressofuso, metacrilato estruso. Diffusore in metacrilato bianco.

Finiture e colori

Diffusore serigrafato bianco opale con settori trasparenti. Corpo verniciato grigio argento.

Montaggio

A parete o a soffitto, anche su superfici infiammabili.

Note

Disponibile anche con intensità luminosa regolabile. Cablato per impianti con interruttore a pulsante normalmente aperto. Funzionante anche con centralina elettronica (non inclusa).

Distribution and applications

The range consists of fittings supplying either direct or indirect, high performance, low energy illumination. Wall or ceiling mounted models for any height requirement.

Two different diffusers (direct or indirect distribution) guarantee high output and a particularly pleasing visual effect.

Materials

Extruded or die-cast aluminium, extruded metacrylate. Metal parts in silver gray, white metacrylate.

Finishes and colours

White screen-printed diffuser with transparent sections. Body in silver gray.

Mounting

Wall and ceiling mount. Suitable for installation on normally inflammable surfaces.

Notes

Available with or without dimmer. Available also with digital control signal (not included).

Diffusion et applications

Le programme d'appareils pour l'éclairage direct ou indirect à haut rendement et basse consommation.

Versions pour paroi et pour plafonds de n'importe quelle hauteur.

Deux diffuseurs (pour émission directe ou indirecte) garantissent un excellent rendement et un exceptionnel effet esthétique.

Matériaux

Aluminium extrudé ou moulé, métacrylate extrudé. Parties métalliques gris argent, métacrylate blanc.

Finition et couleurs

Diffuseur sérigraphié blanc opalin avec des secteurs transparents.

Corps peint gris argent

Montage

Sur paroi et au plafond. Peut être monté aussi sur surface inflammable.

Notes

Disponible avec ou sans régulateur d'intensité lumineuse. Disponible aussi avec console de gestion d'éclairage (non incluse).

Ausstrahlung und Anwendungen

Leuchtenprogramm zur direkten oder indirekten Beleuchtung bei hoher Leistung und geringem Verbrauch.

Als Wand- oder Deckenversion für jede Höhe geeignet. Diffusor garantiert optimale Leistung und aussergewöhnliche Ästhetik.

Materialien

Fließgepreßtes Aluminium oder Druckgußaluminium, fließgepreßtes Metakrylat. Diffusor in weißem Metakrylat.

Ausführungen und Farben

Diffusor siebgedruckt opalweiß mit transparenten Einsätzen. Struktur silbergrau lackiert.

Montage

Auf Wand und Decke. Montage auf normal entflammaren Oberflächen möglich.

Bemerkungen

Dimmbarer Lichtstärke erhältlich. Für Anlagen mit normalgeöffnetem Schalter. Funktioniert auch mit Steuerungseinheit (nicht enthalten).

Emisión y aplicaciones

Sistema de aparatos para iluminación directa o indirecta de alto rendimiento y bajo consumo.

Versiones de pared y techo de cualquier altura. El difusor garantiza un rendimiento óptimo y un excepcional efecto estético.

Materiales

Aluminio extruido o moldeado bajo presión, metacrilato extruido. Difusor en metacrilato blanco.

Acabado y colores

Difusor serigrafado blanco opal con sectores transparentes. Cuerpo lacado gris plata.

Instalación

Para pared o techo, incluso sobre superficies inflamables.

Notas

Disponibles también con intensidad luminica regulable. Cableado para equipos con interruptor a pulsador normalmente abierto. Funciona también con centralita electrónica (no incluida).



Regulus



Diffusore serigrafato bianco opale con settori trasparenti.
Corpo in acciaio verniciato grigio.

White screen-printed diffuser with transparent sections.
Body in gray painted steel.

Diffuseur sérigraphié blanc opalin avec des secteurs transparents.
Corps en acier peint en gris.

Diffusor siebbedruckt opalweiß mit transparenten Einsätzen.
Gehäuse in grau lackiertem Stahl.

Difusor serigrafiado blanco opal con sectores transparentes.
Cuerpo en acero lacado gris.

Regulus

220


Regulus tige
h 27 (direct)



REG F2W 44
189(Ø) x 27(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 44
249(Ø) x 27(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 44
309(Ø) x 27(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus tige dimmable
h 27 (direct)



RED F2W 44
189(Ø) x 27(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 44
249(Ø) x 27(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 44
309(Ø) x 27(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus tige
h 47 (direct)



REG F2W 46
189(Ø) x 47(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 46
249(Ø) x 47(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 46
309(Ø) x 47(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus tige dimmable
h 47 (direct)



RED F2W 46
189(Ø) x 47(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 46
249(Ø) x 47(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 46
309(Ø) x 47(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)



CE




Regulus soffitto
(direct)



REG F2W 51
189(Ø) x 10,5(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 51
249(Ø) x 10,5(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 51
309(Ø) x 10,5(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus parete
(direct/indirect)



REG F2W 31
189(Ø) x 10,5(c)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 31
249(Ø) x 10,5(c)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 31
309(Ø) x 10,5(c)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus SB
(direct)



REG F2W 34
121(Ø) x 40(A)
24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 34
151(Ø) x 40(A)
39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 34
181(Ø) x 40(A)
54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus SB dimmable
(direct)



RED F2W 34
121(Ø) x 40(A)
24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 34
151(Ø) x 40(A)
39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 34
181(Ø) x 40(A)
54W, G5,
T16 (FH-HO),
fluorescent (electronic)



CE




Regulus tige
h 27 (indirect)



REG F2W 43
189(Ø) x 27(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 43
249(Ø) x 27(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 43
309(Ø) x 27(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus tige dimmable
h 27 (indirect)



RED F2W 43
189(Ø) x 27(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 43
249(Ø) x 27(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 43
309(Ø) x 27(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus tige
h 47 (indirect)



REG F2W 45
189(Ø) x 47(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 45
249(Ø) x 47(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 45
309(Ø) x 47(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)



Regulus tige dimmable
h 47 (indirect)



RED F2W 45
189(Ø) x 47(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 45
249(Ø) x 47(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 45
309(Ø) x 47(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)



Regulus soffitto
dimmable (direct)



RED F2W 51
189(Ø) x 10,5(A)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 51
249(Ø) x 10,5(A)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 51
309(Ø) x 10,5(A)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus parete dimm.
(direct/indirect)



RED F2W 31
189(Ø) x 10,5(c)
2x24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 31
249(Ø) x 10,5(c)
2x39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 31
309(Ø) x 10,5(c)
2x54W, G5,
T16 (FH-HO),
fluorescent (electronic)




Regulus SB
(indirect)



REG F2W 33
121(Ø) x 40(A)
24W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F3W 33
151(Ø) x 40(A)
39W, G5,
T16 (FH-HO),
fluorescent (electronic)

REG F5W 33
181(Ø) x 40(A)
54W, G5,
T16 (FH-HO),
fluorescent (electronic)



Regulus SB dimmable
(indirect)



RED F2W 33
121(Ø) x 40(A)
24W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F3W 33
151(Ø) x 40(A)
39W, G5,
T16 (FH-HO),
fluorescent (electronic)

RED F5W 33
181(Ø) x 40(A)
54W, G5,
T16 (FH-HO),
fluorescent (electronic)

